


## 1U FIBER OPTICAL ROTARY SPLITTER PANEL – SW02-000-xx

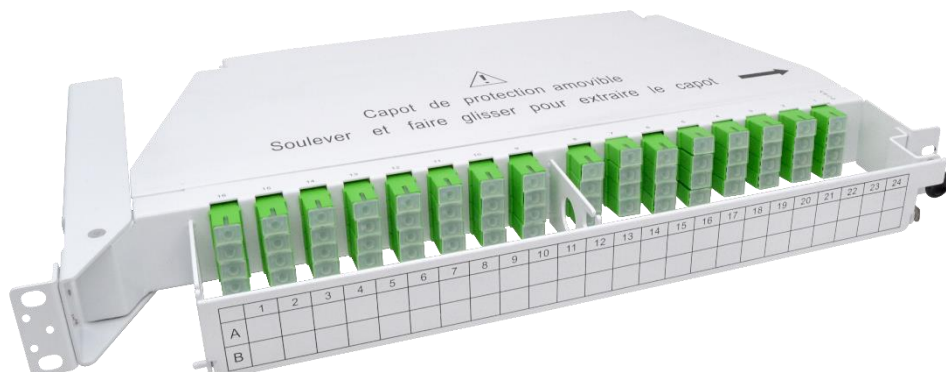

Browse on Mobile

 Browse on Web

NEXCONEC® 1U rotary splitter panel is widely used in optical communication networks, completing such functions as splicing, splitting and 64-fiber distribution. It can be installed optical splitter (maximum splitting ratio: one 1X64 optical splitter) to implement optical splitting and capacity expansion. After the product left-handed rotated, fixing optical splitter and back panel of splicing tray left-handed rotated. Backbone inlets adopt embedded way, convenience for operation and maintenance.

### FEATURES

- ✓ 64 SC Simplex adapters for the output of the splitter
- ✓ 4 SC Simplex adapters for the input of splitters
- ✓ Splitter type, 1pc-1X64 or 2pcs-1X32, or 4pcs 1X16 and so on
- ✓ Easy to operate, Right or Left Hinge swing out
- ✓ Standard 19/21 inch installation
- ✓ Maintain the bend radius of all fibers inside the module at 30mm

### APPLICATIONS

- ✓ Datacenter storage area & Central office, POP
- ✓ Fiber to the home (FTTH) Street cabinets
- ✓ LAN/WAN

## SPECIFICATIONS

<b>Mounting Type</b>	19" and compatible ETSI 21"
<b>Opening Type</b>	Right or Left Hinge swing out
<b>Dimension</b>	44 x 482 x 260 mm
<b>Material</b>	Anticorrosive Steel and FR polymer
<b>Housing Color</b>	Painted light grey RAL7035
<b>Maximum Capacity</b>	12 Splice + 64 SC adapter
<b>Maximum Splice Tray</b>	1x12 Fibers/tray
<b>Operating Temperature</b>	−25°C ~ +55°C (5 to 95% RH)
<b>Net Weight</b>	3 Kg

## DESIGN - HARDWARE

<b>Slot Type</b>	SC Simplex adapters
<b>Number of Slots</b>	64

## ORDER INFORMATION

Part Number	Product Description
<b>SW02-000-LF</b>	1U Splitter Pivot Panel, 64 SC Adapters Ports Unloaded, Left Opening
<b>SW02-000-RI</b>	1U Splitter Pivot Panel, 64 SC Adapters Ports Unloaded, Right Opening

*\*Custom loading of the panel on demand*