


CAT.6A U/FTP 23AWG CABLE - CC6AUFBL5

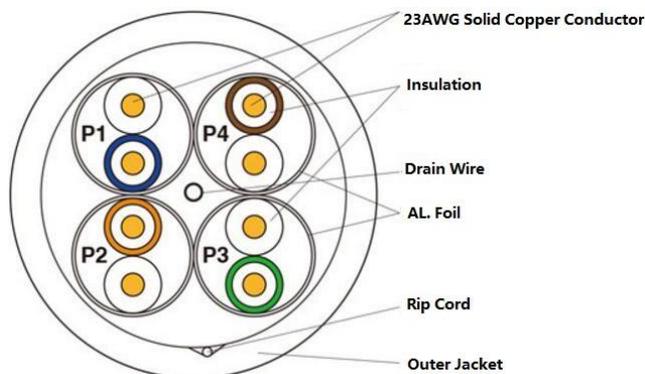

Browse on Mobile

 [Browse on Web](#)

NEXCONEC[®] Category 6A U/FTP cables are specifically designed to deliver robust standards based performance ensuring optimum bandwidth for today's high speed network applications. The cable is designed to support horizontal networking applications over distances up to 100 meters.

Each Category 6A U/FTP exceed the minimum specified performance for Category 6A U/FTP cables and support all CLASS EA applications.

FEATURES

- ✓ Conform to IEC, EIA-TIA performance requirements
- ✓ 23AWG premium grade copper conductor
- ✓ U/FTP cable structure for better shielding in heavy external interference environments
- ✓ Support application with PoE, IEEE 802.3bt PoE++ Type 4
- ✓ Cable jacket available in LSZH, CM, PVC
- ✓ CPR Euro classes certified on demand 

APPLICATIONS

- ✓ Supports category 6A (Class EA) networks running up to 500MHz applications
- ✓ Ideal for environments where external interferences can disrupt signals
- ✓ Horizontal and backbone in structured cabling installations

SPECIFICATIONS

Parameters	Value
Electrical Performance	Certified performance in a 4-connector configuration up to 100 meters
Conductor/Insulator	23 AWG solid copper insulated with HPDE
Operating Temperature	-20°C ~ +75°C
PoE Application	IEEE 802.3bt PoE++ Type 4
Compliance	ANSI/TIA-568-C.2, ISO 11801, IEC 60603-7
RoHS Compliance	Compliant

CABLE SPECIFICATION (CONSTRUCTION)

Parameters	Units	Value
Cable Jacket Type		LSZH/PVC/PE CPR B2ca (s1a,d1,a1)
Cable OD	mm	7.2mm±0.2mm 7.5mm±0.2mm
Shielding		U/FTP, an aluminized polyester tape applied with a 15% minimum overlap at each pair, the drain wire is attached to the Al. foil
Insulation		Skin-foam-skin PE
Pair Color Codes		Pair 1: White, and Blue Pair 2: White, and Orange Pair 3: White, and Green Pair 4: White, and Brown
Sheath Color		Blue (RAL 5015) Grey (RAL 7044) Black (RAL 9005) White (RAL 1013)
Conductor		23AWG Solid Copper

CABLE SPECIFICATION (MECHANICAL)

Parameters	Value
Bulk Cable Weight	55 Kg/Km
Max. Pull Tension	100N
Min. Bend Radius (installation)	8x OD.
Min. Bend Radius (installed)	4x OD.
Cold Bend	No crack @-20°C x 4hrs
Storage Temperature	-20°C ~ +70°C
Operation Temperature	-20°C ~ +75°C
Installation Temperature	0°C to +50°C

CABLE SPECIFICATION (ELECTRICAL PROPERTIES AT 20°C)

Parameters	Units	Value
Characteristic Impedance	(1-100MHz) (100-250MHz) (250-500MHz)	100 ±15Ω 100 ±18Ω 100 ±25Ω
DC Resistance	Ω/100m	≤ 9.35Ω/100m max.
Resistance Unbalance	%	≤ 2%
Capacitance Unbalance to Earth	Pf/km	≤ 330 pF/km
Delay Skew	ns/100m	≤ 40ns/100m
Nominal Velocity of Propagation	%	68%
Propagation Delay (Nominal)	ns/100m	533ns/100m at 500MHz
Test Voltage (d.c. for 1 minute) Conductor /Conductor	VDC	1000V
Insulation Resistance (500V d.c)	MΩ	≥ 500MΩ/KM
Max. Operating Voltage	V	80V

TRANSMISSION LINE PERFORMANCE AT 20°C

Freq. MHz	RL ≥dB	ATT ≤dB	NEXT ≥dB	PHASE DELAY ≤ns	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB
1	20	2	74.5	570	72.3	68	65
4	23	3.7	65.3	552	63.3	56	53
10	25	5.9	59.3	545	57.3	48	45
20	25	8.3	54.8	541.2	52.8	42	39
62.5	21.5	14.9	47.4	538.5	45.4	32.1	29.1
100	20	19	44.3	537.6	42.3	28	25
250	17.3	31	38.2	536.1	36.5	20	17
500	15.2	45.4	33.7	532	31.8	14	11
600*	17.3	50.1	60.7	535.5	57.7	38.4	35.4
800*	17.3	58.92	58.9	535.3	55.9	35.9	32.9

* Performance for frequencies beyond TIA and ISO requirements are for information only.

ORDER INFORMATION

CC	1	2	3	4	5
----	---	---	---	---	---

CC	1	CABLE CATEGORY	2	CABLE STRUCTURE	3	JACKET COLOR	4	JACKET MATERIAL	5	PACKING
	6A	CAT 6A	UF	U/FTP	BL	BLUE	L	LSZH	5	500MTR/REEL
					GY	GREY	LC	LSZH CPR CCA		
					WH	WHITE	LB	LSZH CPR B2CA		
					BK	BLACK	C	PVC CM		
					GR	GREEN	P	PVC		
					PR	PURPLE	E	PE		
					RD	RED				