


FIBER OPTIC ADAPTER

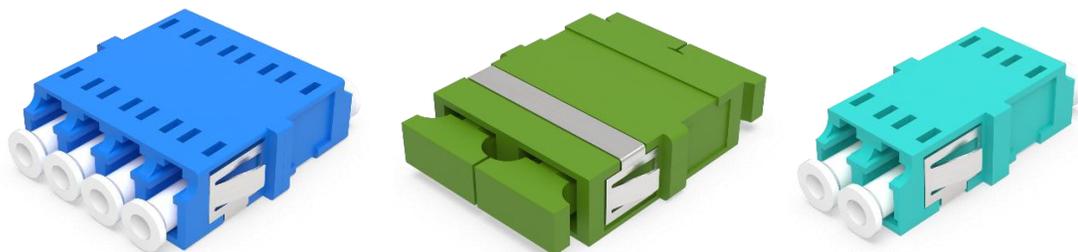

Browse on Mobile

 [Browse on Web](#)

NEXCONEC[®] Fiber Optic Adaptors are a range of high-quality adaptors which have high precision alignment sleeves for high reliability and better repeatability. The housing is available in different colors (for SC and LC only) and with options for flange or flangeless body and metal clips.

FEATURES

- ✓ Complies with IEC , TIA and Telcordia standards
- ✓ High precision alignment sleeve
- ✓ Low insertion loss and high repeatability
- ✓ ROHS, REACH SvHC compliant

APPLICATIONS

- ✓ Telecommunications networks
- ✓ CATV, LAN, MAN, and WAN application
- ✓ Fiber-to-the-home
- ✓ Premises distribution

SPECIFICATIONS

| ADAPTER CHARACTERISTICS | | |
|--------------------------|-------------|----------------|
| Parameter | Value | Standard |
| Insertion Loss (typical) | 0.2dB | IEC 61300-3-4 |
| Mating Durability | 500 | IEC 61300-3-4 |
| Operating Temp. | -25 ~ +70 C | IEC 61300-2-22 |

ORDER INFORMATION

| | | | | | |
|----|---|---|---|---|---|
| AA | 1 | 2 | 3 | 4 | 5 |
|----|---|---|---|---|---|

| AA | 1 | ADAPTER CONFIG | 2 | TYPE | 3 | FIBER PORT | 4 | Flange (ONLY SC/LC) | 5 | HOUSING COLOR (ONLY SC/LC) |
|----|----|----------------|---|-------------|---|------------|---|---------------------|---|----------------------------|
| | S1 | SC | S | Single mode | S | Simplex | F | flange | L | Blue |
| | S2 | SCA | M | Multimode | D | Duplex | N | no flange | N | Green |
| | L1 | LC | | | Q | Quad | | | E | Beige |
| | L2 | LCA | | | | | | | Q | Aqua |
| | F1 | FC | | | | | | | V | Erica Violet |
| | F2 | FCA | | | | | | | | |
| | T1 | ST | | | | | | | | |
| | E1 | E2000 | | | | | | | | |
| | E2 | E2000A | | | | | | | | |