




Use two fingers to pick the middle area of lid (as shown above in pic-1) and lift up to easy remove the lid from module to access patching adapters.

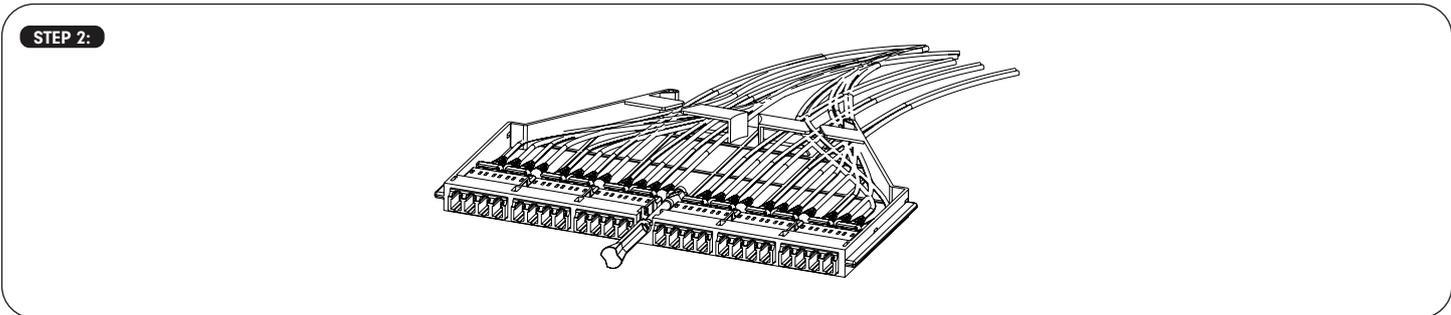


Plug the patchcords into adapters.

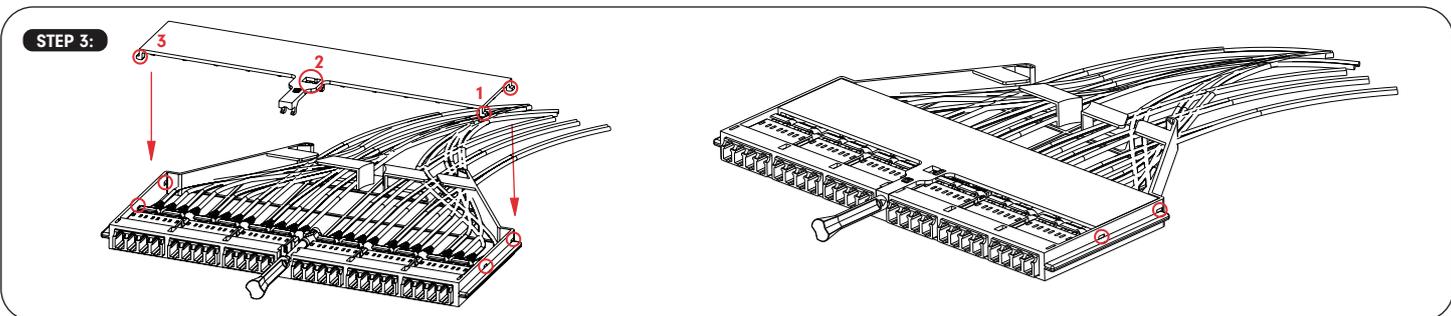

Insert back the lid by matching lid flange (1) with module holes, then match middle part (2) and hold middle area with a thumb and then match lid flange (3) with module holes to make easy and perfect fit.

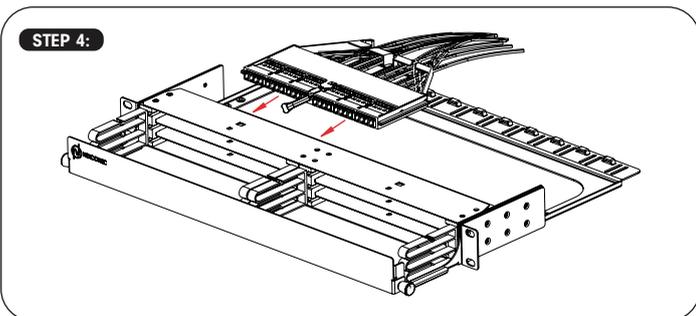

Insert patching module from rear side of the panel & keep enough margin of patchcords in the rear side to make sure easy movement of the module.

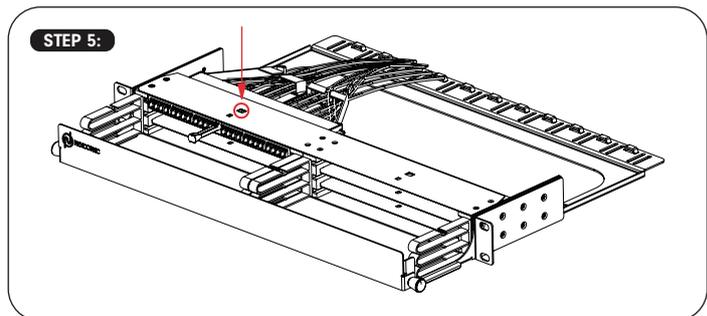

Rotate the push/pull tab of the module into lock position to restrict its movement.

