

1U 24 PORTS FC SX/ST SX SLIDING PATCH PANEL – MP2PP03







NEXCONEC® 1U Sliding Patch Panel accepts 24 adapters FC Simplex/ST Simplex within 1U space (Up to 24FO). The panel can be pre-loaded completely with the required adapter plates and pigtails.

The unique panel design incorporates a removable see-through lid & a transparent hinged drop-down door, providing a smooth slide mechanism facilitated by effortless lock-and-release plastic latches on two sides. This design enables it to fully extend when sliding out. Additionally, it ensures easy access & simplifies labelling, maintenance routines and installation activities.

FEATURES

- Up to 24FO on 1U
- Standard 19" Rack mounting type
- High durability & light weight PC & PC+ABS material
- 4 Rear Cable entries
- Accepts Indoor and Outdoor Pre-terminated cables and conventional splicing
- Transparent lid for easier maintenance and verification
- Enhanced labelling on the front door providing patch cords protection and better identification
- Simple and easy installation with integrated fiber routing
- RoHS, REACH SvHC



APPLICATIONS

- ✓ Data centers, Premises installations, Enterprise networks
- ✓ Ethernet, Fiber Channel, ATM, LAN, MAN and WAN
- ✓ Data communication and telecommunication networks
- ✓ Indoor applications

PANEL SPECIFICATIONS

Parameters	Value		
Mounting Type	Rack 19"		
Opening Type	Sliding Tray		
Access Type	Front and Rear access		
Front Cable Management	Front manager with Hinged transparent drop-down door		
Cable Entry Direction	Rear		
Rear Cable Management	4 Cable Entries (OD: 2x PG13.5 and 2x PG16 mm)		
Slot Type	FC Simplex/ ST Simplex Footprint		
Number of Ports	24 Ports		
Fiber Capacity	24FO in FC/ST		
Height Unit	1U		
Dimensions (W x D x H in MM)	482 x 290.1 x 43.5 mm		
Material	PC & PC+ABS		
Housing Color	Black or [Grey (RAL 7035) Optional]		
Compliance	Rohs, Reach Svhc		
Application	Indoor IP20		
Lockable	No		
Net Weight	1.5 Kg		



PIGTAIL SPECIFICATIONS (SINGLE FERRULE CONNECTOR)

Parameters	IL – Max	IL – Typical	RL (PC/APC)
SM – Standard	≤ 0.30 dB	≤ 0.20 dB	> 55/65 dB
SM – Premium	≤ 0.15 dB	≤ 0.12 dB	> 55/65 dB
MM – Standard	<u><</u> 0.30 dB	≤ 0.18 dB	> 28 dB
MM – Premium	≤ 0.15 dB	<u><</u> 0.08 dB	> 28 dB

PIGTAIL BUFFER CHARACTERISTICS

Parameters	Unit	Value (Simplex)
Nominal Buffer Diameter	μm	900 +50/-50
Crush Resistance	N/100mm	500
Maximum Tensile Load	N	6
Minimum Bending Radius	mm	15
Operating Temperature	°C	-20 ~ +60

ORDER INFORMATION

Product	Part Number	Product Description
	MP2PP03*	1U 24 Ports FC Simplex/ST Simplex Sliding Patch Panel (Black)

^{*} Add "G" at the end of Part Number for Telecom panels in Grey color. (Example: MP2PP03G)
Included kit in the package: 1x Gland PG13.5, 1x Cable Tie, 4x Cage Nuts & Screws, 4x Splice Holders.




CUSTOM PANEL KIT CONFIGURATOR


MP2PP03 1 2 3 4	
-----------------	--

MP2PP03	1	Adapter Type	2	Adapter Count	3	Pigtails Type		4	Pigtails Loading Type	
	F	FC Simplex	-	None	-	No Pigtails	-	Tight Buffer	-	FOTAG EIA/TIA 598 (1 Blue/ 2 Orange etc.)
	Т	ST Simplex	6	6 Adapters	F1A1	FC/UPC SMF OS2	E	Easystrip	FT	France Telecom (1 Red, 2 Blue, etc.)
			12	12 Adapters	F2A1	FC/APC SMF OS2			PK	Included in pack, Uninstalled
			24	24 Adapters	T1A1	ST/UPC SMF OS2				
					F103	FC/UPC MMF OM3				
					F104	FC/UPC MMF OM4				
					T103	ST/UPC MMF OM3				
					T104	ST/UPC MMF OM4				

^{*}Ask sales for other products and configuration not shown. sales@nexconec.com

TECHNICAL DRAWING

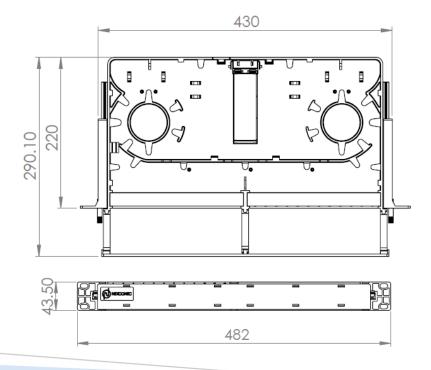









RELATED PRODUCTS AND ACCESSORIES

Product	Part Number	Product Description	
	MP2PL01*	MP2 Adapter Plate 12 LC DX Blue (Loaded)	
	MP2PL02	MP2 Adapter Plate 12 LC DX Green (Loaded)	
	MP2PL03	MP2 Adapter Plate 12 LC DX Aqua (Loaded)	
	MP2PL03V	MP2 Adapter Plate 12 LC DX Erika Violet (Loaded)	
9 7 7 9 7 9 7 7 7 7 7 7 7 7 7 7 7 7 7 7	MP2PL04	MP2 Adapter Plate 12 SC SX Blue (Loaded)	
DANAMAN	MP2PL05	MP2 Adapter Plate 12 SC SX Green (Loaded)	
a a a a a a a a a a a a a a a a a a a	MP2PL06	MP2 Adapter Plate 12 SC SX Aqua (Loaded)	
a a a a a a a a a a a a a a a a a a a	MP2PL06V	MP2 Adapter Plate 12 SC SX Erika Violet (Loaded)	
111111111111111111111111111111111111111	MP2PL07	MP2 Adapter Plate 12 SC DX Blue (Loaded)	



HATTOTOTO	MP2PL08	MP2 Adapter Plate 12 SC DX Green (Loaded)
99999999	MP2PL09	MP2 Adapter Plate 12 SC DX Aqua (Loaded)
ananami .	MP2PL09V	MP2 Adapter Plate 12 SC DX Erika Violet (Loaded)
	MP2PL10	MP2 Adapter Plate 12 LC QD Blue (Loaded)
	MP2PL11	MP2 Adapter Plate 12 LC QD Green (Loaded)
	MP2PL12	MP2 Adapter Plate 12 LC QD Aqua (Loaded)
	MP2PL12V	MP2 Adapter Plate 12 LC QD Erika Violet (Loaded)
1000 CO. 100	MP2PL13	MP2 Adapter Plate 12 FC SX (Loaded)
117773	MP2PL14	MP2 Adapter Plate 12 ST SX (Loaded)
	MP2PLS	MP2 Adapter Plate 12 SC SX/LC DX (Unloaded)
	MP2PLD	MP2 Adapter Plate 12 SC DX/LC QD (Unloaded)



	MP2PLF	MP2 Adapter Plate 12 FC/ST SX (Unloaded)
	MP2PL00	MP2 Blank Plate
15	MP2BP01	MP2 Blank Plug SC SX/LC DX
11	MP2BP02	MP2 Blank Plug SC DX/LC QD

^{*} Add "G" at the end of Part Number for Telecom adapter plates in Grey color. (Example: MP2PL01<mark>G</mark>)

