


1U FIBER OPTICAL ROTARY PATCH PANEL - SW01-48SCA-xx





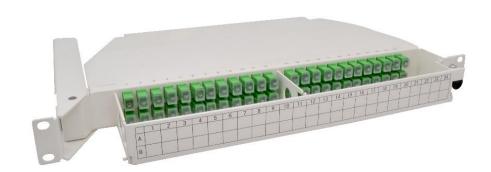

Rotary Swing out patch panels are designed for the FTTH networks, specifically for the street cabinet where full front access is required. This 1U panel accommodates 48 SC/APC adapters and is loaded with bend insensitive pigtails G657A2 and the complete splicing trays and rooting.

FEATURES

- Holds up to 48 SC Simplex footprint adapters
- Designed for 19" and ETSI 21" frames
- Right and left opening
- Supplied fully loaded ready to splice

APPLICATIONS

- Datacenter storage area & Central office, POP
- Fiber to the home (FTTH) Street cabinets
- LAN/WAN



SPECIFICATIONS

Mounting Type	19" and compatible ETSI 21"
Opening Type	Right or Left Hinge swing out
Dimension	44 x 482 x 265mm
Material	Anticorrosive Steel and FR polymer
Housing Color	Painted light grey RAL7035
Operating Temperature	−25°C~+55°C(5 to 95% RH)
Net Weight	2.1kg

DESIGN - HARDWARE

Slot Type	SC/APC Simplex adapters
Number of Slots	48
Fiber Type	Single mode Bend Insensitive G657A2 Easystrip
Insertion Loss	IL ≤ 0,20dB / RL 65dB

ORDER INFORMATION

Part Number	Product Description
SW01-48SCA-LF	1U Pivot Panel 48FO SCA loaded Pigtails SC/APC OS2 G657A2 LSZH Easystrip, Opening Left
SW01-48SCA-RI	1U Pivot Panel 48FO SCA loaded Pigtails SC/APC OS2 G657A2 LSZH Easystrip, Opening Right